

1.05 Motorised Roller System

47mm/56mm/69mm tube Vertilux patent no 2004906134

Technical Information


1. 40mm / 50mm motor Motor to suit application.
2. Key tube Aluminium alloy tube, with multiple cloth fixing. 47mm / 56mm / 69mm external.
3. Female tube connector UV stabilised nylon. Idle end connector. 40mm.
4. Brackets Male and female colour coordinated pressed powdercoated steel.
5. Idle end pin lock UV stabilised nylon with high resistance to ultraviolet light. 4mm tolerance.
6. Motor plate adaptor UV treated nylon.
7. Ring adaptors UV stabilised nylon adaptor for 40mm / 56mm / 69mm tube.
8. Base rail Extruded aluminium manufactured to ISO9001 patent Vertilux design available in various colours.

Dimensions & Limitations

MINIMUM WIDTH*	LS 40 - 600mm	MAXIMUM WIDTH*	3000mm
	LT 50 - 670mm	MINIMUM DROP*	500mm
	RTS 40 - 630mm	MAXIMUM DROP*	5000mm
	RTS 50 - 730mm		

Note: Sizes with Fabric widths typically over 3000mm will void warranty.


Standard Base Rail Options




27.5mm Ovolo with bumper

25mm Tear Drop with bumper


NOTE: Dimensions relate to height of Base Rail.

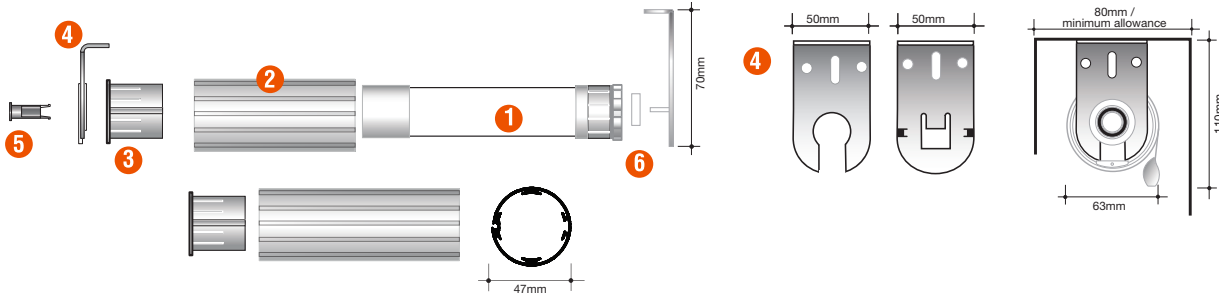

50mm Motor with 56mm/69mm Adaptors

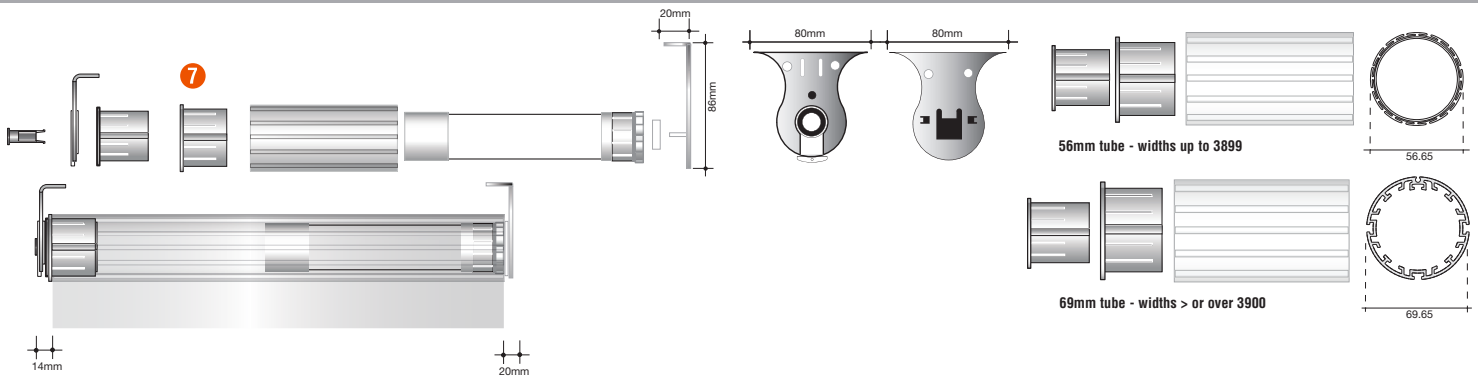

Idle End / Intermediate Brackets

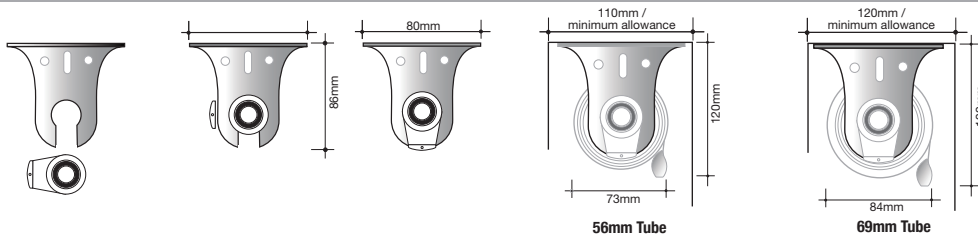

References

