

1.12a Fully Enclosed Kasset System – 80mm or 100mm Component Options

Technical Information

1. Face cover plate – 80mm or 100mm	Extruded aluminium manufactured to ISO9001.
2. Back rail section – 80mm or 100mm	Extruded aluminium manufactured to ISO9001.
3. Headrail endcaps L/R with side channel adaptor	Moulded from U.V resistant acetal.
4a. 70mm side channel or	Extruded aluminium manufactured to ISO9001.
4b. 50mm side channel	Extruded aluminium manufactured to ISO9001.
5. Bracket male	Zinc coated steel.
6. Bracket female	Zinc coated steel.
7. Tube	Extruded aluminium manufactured to ISO9001.
8. Endcap	Zinc coated steel.
9. Motor mount	Zinc coated steel.
10. Base rail	
10a. 35mm	Extruded aluminium manufactured to ISO9001.
or	
10b. 50mm	Extruded aluminium manufactured to ISO9001.
11. Guidewire	
11a. Endcap for guide wire	Moulded from U.V resistant acetal.
11b. Fabric guide endcap	Moulded from U.V resistant acetal.
11c. Endcap	Moulded from U.V resistant acetal.


Dimensions & Limitations

	80mm Clutch	100mm Clutch	100mm Motor
MAXIMUM WIDTH*	3000mm	3150mm	3750mm
MINIMUM DROP*	500mm	600mm	500mm
MAXIMUM DROP*	3000mm	4800mm	4800mm

****The above is a guide only - Dependent on Fabric type used due to variable fabric thickness.**


Note: Sizes with Fabric widths typically over 3000mm will void warranty.

Standard Base Rail Options

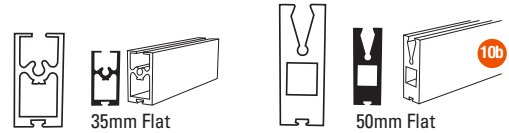


NOTE: Dimensions relate to height of Base Rail.

80mm or 100mm Component Options

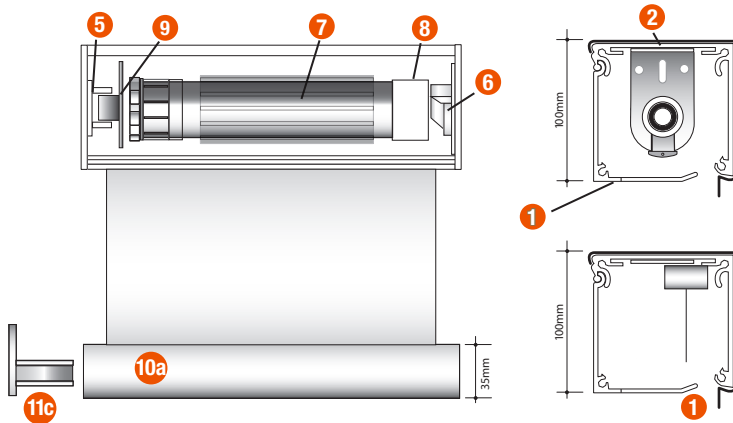

Options

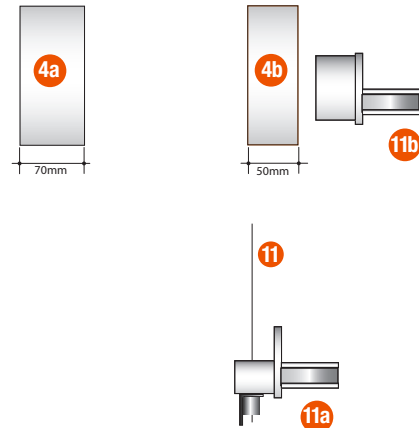

NOTE: 80mm Fully Enclosed Kasset is only suitable for a Manual System

References

