

1.13a Manual Bottom Up Roller Blind System

Technical Information

- | | |
|-----------------------|--|
| 1. Face cover plate | Extruded aluminium manufactured to ISO9001. |
| 2. Back rail section | Extruded aluminium manufactured to ISO9001. |
| 3. Headrail endcaps | Moulded from U.V resistant acetal. |
| 4. Clutch | Winder with direct action dual reverse clutchwound springs. U.V. stabilised nylon with high resistance to ultraviolet light. |
| 5. Booster | High tensivity wound steel wire coiled spring booster, with high ratio winding. Vertilux patent no 53651-00. |
| 6. Tube | 40mm standard tube - widths from 600mm to 2199mm.
47mm tube - widths from 2200mm 3299mm. |
| 7. Idle end plug | Quickturn spring release for easy pin insertion into bracket. U.V. stabilised nylon. |
| 8. Brackets | Male and female colour coordinated pressed powdercoated steel. |
| 9. Base rail | Extruded aluminium manufactured to ISO9001. |
| 10. Endcap | Moulded from U.V. resistant acetal. |
| 11. Pulleys | |
| 12. Break-away Safety | Moulded from U.V. resistant abs cedal. |
| 13. Tassel | Moulded from U.V. resistant polypropylene. |
| 14. Kasset Bracket | Extruded aluminium manufactured to ISO9001. |


Dimensions & Limitations

	80mm Headbox
MAXIMUM WIDTH*	3000mm
MINIMUM DROP*	500mm
MAXIMUM DROP*	3000mm

****The above is a guide only - Dependent on Fabric type used due to variable fabric thickness.***


Note: Sizes with Fabric Widths over 3000mm will void warranty.

Standard Base Rail



NOTE: Dimensions relate to height of Base Rail.

Componentry

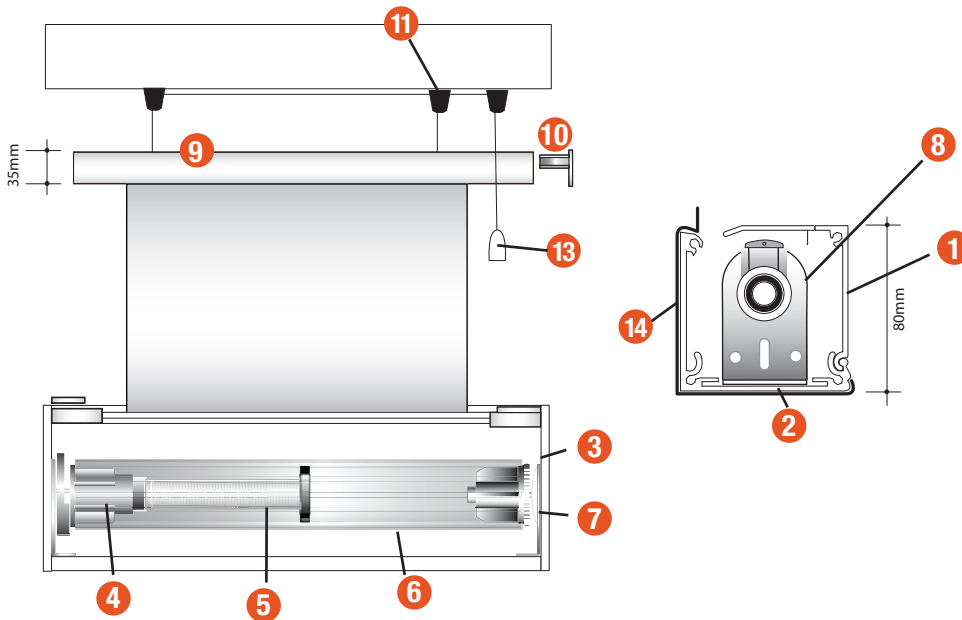

References

