

3.2 Cordloop Pleated & Duopleat System


Technical Information

- 1. Head rail Extruded aluminium manufactured to ISO9001.
- 2. Head rail end cap Moulded from U.V. resistant polypropylene.
- 3. Brackets Spring steel.
- 4. Base rail Moulded from U.V. resistant polypropylene.
- 5. Base rail end cap Moulded U.V. plastic ball chain with polyester core.
- 6. Clutch - Left or Right Hand Moulded from U.V. resistant polypropylene mechanism.
- 7. Cord Joiner Moulded from U.V. resistant polypropylene.
- 8. Loop Cord
- 9. Fabric Woven polyester, metallised and non-metallised finishes available.


Dimensions & Limitations

	TOP DOWN	
	Pleated	Duopleat
MINIMUM WIDTH	560mm	560mm
MAXIMUM WIDTH	3660mm	3660mm
MAXIMUM DROP	3040mm	3040mm
MAXIMUM AREA	11sqm	11sqm
	TOP DOWN - BOTTOM UP & DAY/NIGHT	
	Pleated	Duopleat
MINIMUM WIDTH	610mm	610mm
MAXIMUM WIDTH	3660mm	3660mm
MAXIMUM DROP	3040mm	3040mm
MAXIMUM AREA	11sqm	11sqm
	D/N: 5 - 9sqm/shade	D/N: 5.5 - 5.6sqm/shade

Componentry

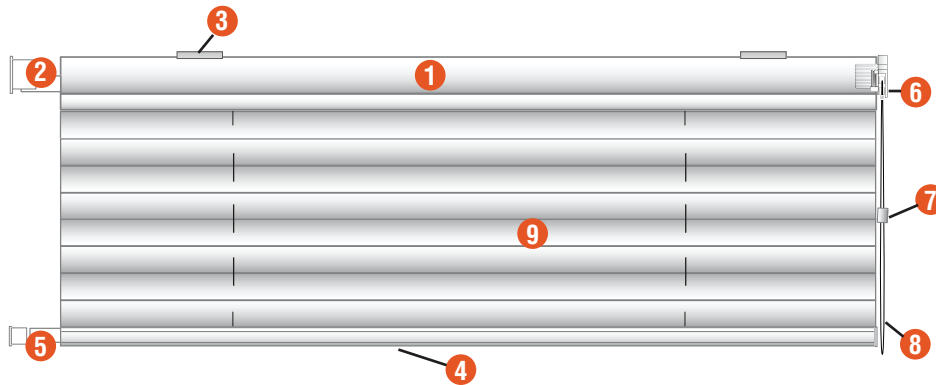

Brackets

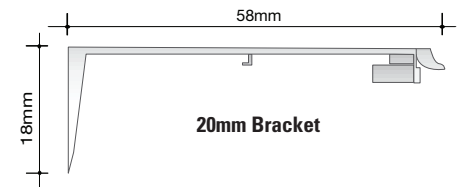

References

