

3.3 Motorised Pleated/Duopleat System

Technical Information

- 1. Motor support Moulded from U.V. resistant acetal.
- 2. Motor 40mm to suit application.
- 3. Tube Extruded aluminium manufactured to ISO9001.
- 4. Tube support Moulded from U.V. resistant acetal.
- 5. Female end cap with thread Moulded from U.V. resistant acetal.
- 6. Male end cap with screw Powdercoated steel.
- 7a. Head box Extruded aluminium headbox.
- 7b. Head box Extruded aluminium headbox coverplate for easy access, maintenance and fitting.
- 8. Brackets Extruded aluminium manufactured to ISO9001.
- 9. Side channels (optional) Extruded aluminium manufactured to ISO9001. SKYLIGHT SYSTEM WITH SIDE CHANNELS.


Dimensions & Limitations

| | STANDARD Pleated | Duopleat |
|---------------|------------------|------------------|
| MINIMUM WIDTH | 700mm | 700mm |
| MAXIMUM WIDTH | 5800mm | 3000-4400mm |
| MAXIMUM DROP | 6000mm | 4000mm |
| MAXIMUM AREA | 12m ² | 12m ² |


For all custom-designed windows that are not square or rectangular in shape, please supply drawings for consideration.

| | SKYLIGHT Pleated | Duopleat |
|---------------|------------------|----------|
| MINIMUM WIDTH | 700mm | 700mm |
| MAXIMUM WIDTH | 4000mm | 4000mm |
| MAXIMUM DROP | 5000mm | 4000mm |


Componentry

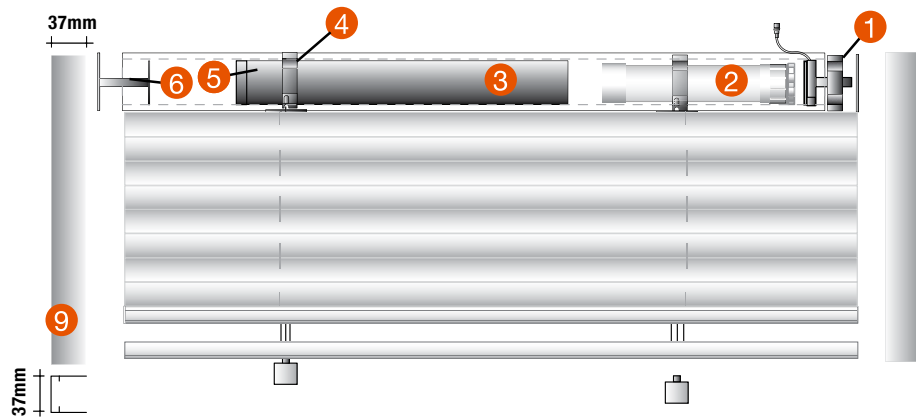

Fixing

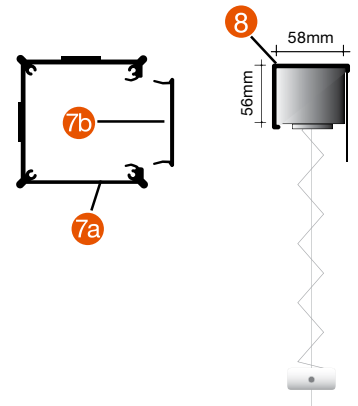

References

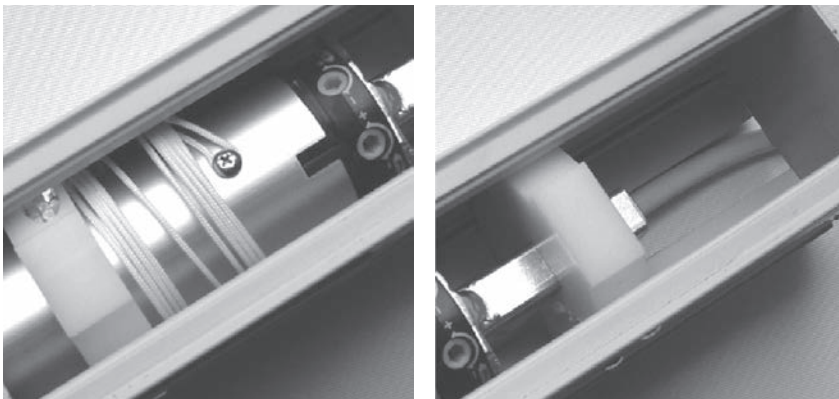

No unauthorised reproduction of images, wording and technical drawing without permission from Vertilux. Product specifications may change without notice. The colour image reproduction may vary slightly to actual product. All variations are within industry standards.