

4.0 Avanti Roman Blind System


Technical Information

1. Cordlock (optional) Aluminium housing with brass wheels and acetal components.
2. Head rail Extruded aluminium manufactured to ISO9001.
3. Swivel pulley Moulded from U.V. resistant acetal.
4. Top end cap Moulded from U.V. resistant acetal.
5. Headrail spline Extruded polypropylene.
6. Batten end cap Moulded U.V. resistant polypropylene.
7. Break-away safety cord joiner Moulded from U.V. resistant abs cedal.
8. Cord 1.8mm high tensile 100% polyester multifilament yarn.
- 9a. Back Batten Extruded aluminium manufactured to ISO9001.
- 9b. Front Batten Extrusion U.V. stabilised.
10. Base rail Extruded aluminium manufactured to ISO9001.
11. Batten spline Extruded flexible PVC.
12. Bracket Spring loaded pressed zinc coated steel.
13. Tassel Moulded U.V. resistant polypropylene.


Dimensions & Limitations

MINIMUM WIDTH	300mm
MAXIMUM WIDTH	3000mm
MINIMUM DROP	400mm
MAXIMUM DROP	3000mm
MAXIMUM AREA	6m ²

Componentry

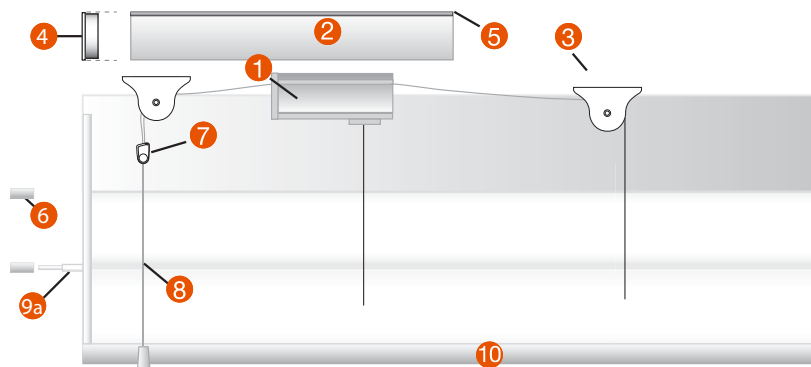

Bracket + Pelmet Allocations

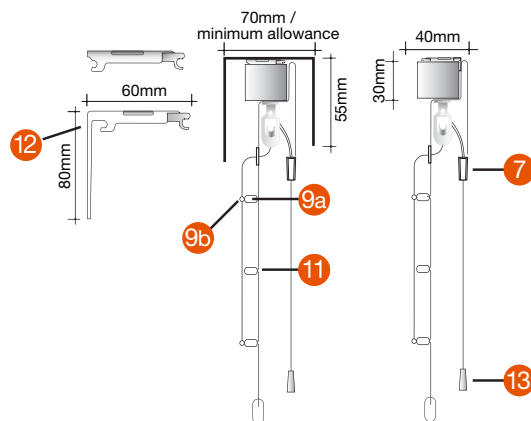

References

