

# 4.3 Traditional Roman Blind System

## Technical Information


- 1. Cordlock Aluminium housing with brass wheels and acetal components.
- 2. Timber headrail 45mm x 25mm painted timber.
- 3. Swivel pulley Moulded from U.V. resistant acetal.
- 4. Batten end cap Moulded U.V. resistant polypropylene.
- 5. Break-away safety cord joiner Moulded from U.V. resistant abs cedal.
- 6. Cord 1.8mm high tensile 100% polyester multifilament yarn.
- 7. Batten Extruded aluminium manufactured to ISO9001.
- 8. Batten ring Moulded U.V. acetal.
- 9. Batten spline Extruded flexible PVC.
- 10. Base rail\*\*\* Extruded aluminium manufactured to ISO9001.
- 11. Tassel Moulded U.V. resistant polypropylene.

\*\*\* Optional Base Rail Detail


## Dimensions & Limitations

MINIMUM WIDTH	300mm
MAXIMUM WIDTH	3000mm
MINIMUM DROP	400mm
MAXIMUM DROP	3000mm
MAXIMUM AREA	6m <sup>2</sup>

## Componentry

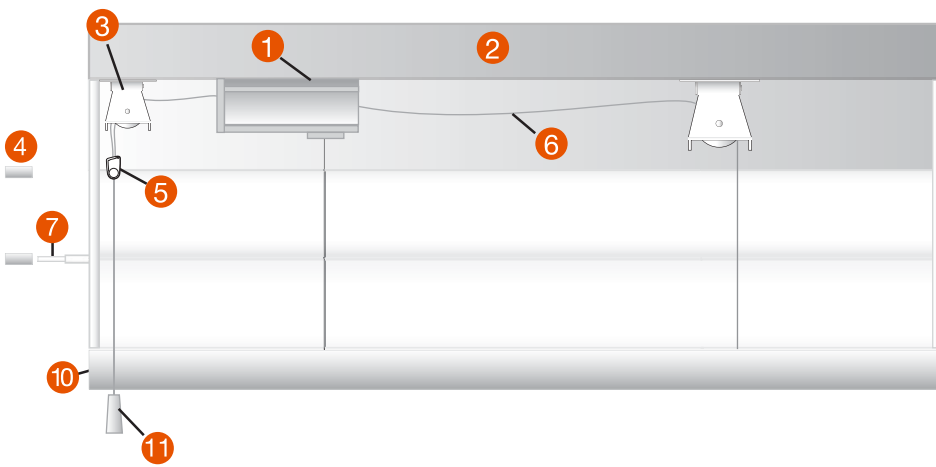

## Assembly

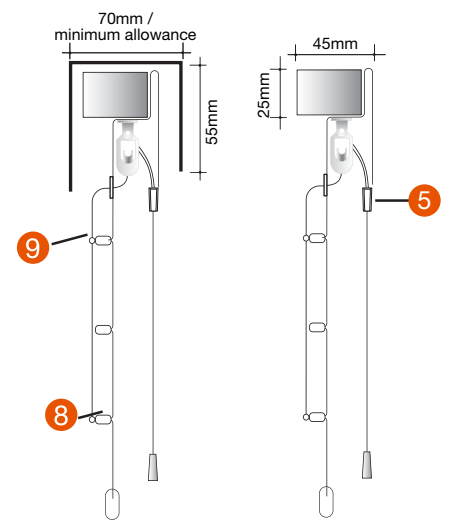

## References



No unauthorised reproduction of images, wording and technical drawing without permission from Vertilux. Product specifications may vary slightly to actual product. All variations are within industry standards.