

4.4 Motorised Roman System


Technical Information

- 1. Motor support Moulded from U.V. resistant acetal.
- 2. Motor 40mm to suit application.
- 3. Tube Extruded aluminium manufactured to ISO9001.
- 4. Tube support Moulded from U.V. resistant acetal.
- 5. Female end cap with thread Moulded from U.V. resistant acetal.
- 6. Male end cap with screw Powdercoated steel.
- 7a. Head box Extruded aluminium headbox.
- 7b. Head box coverplate Extruded aluminium headbox coverplate for easy access, maintenance and fitting.
- 8. Brackets Extruded aluminium manufactured to ISO9001.


Dimensions & Limitations

MINIMUM WIDTH	600mm
MAXIMUM WIDTH	2800mm
MINIMUM DROP	400mm
MAXIMUM DROP	3000mm
MAXIMUM AREA	8.4m ²


Componentry

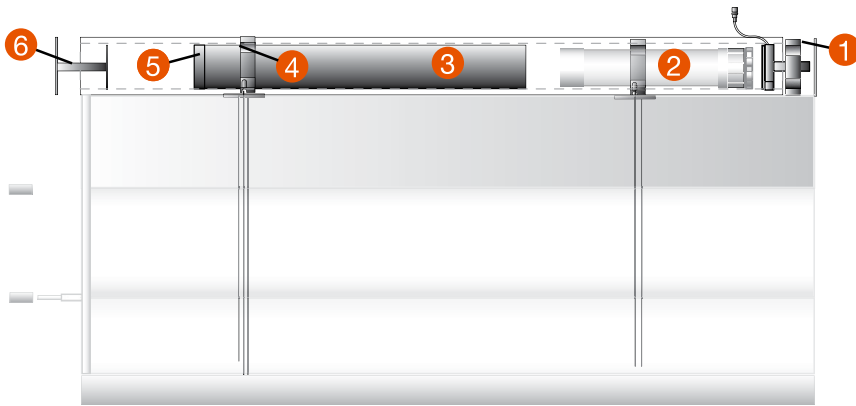

Assembly

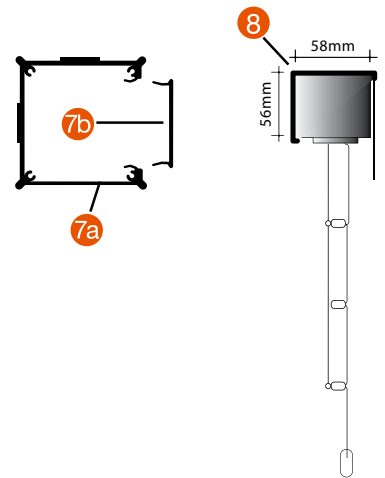

References

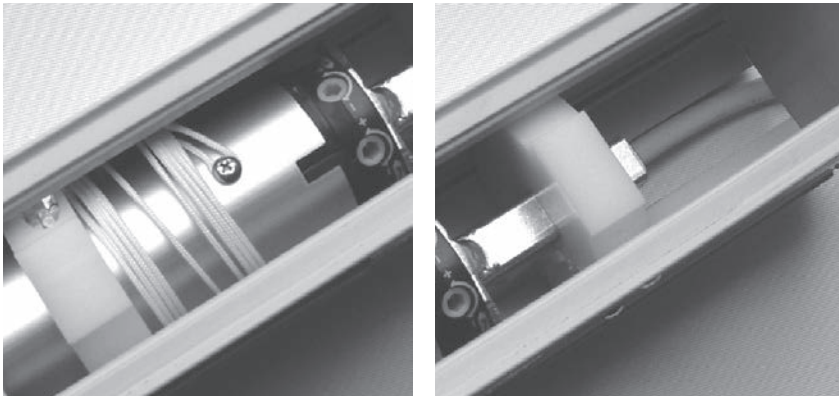

No unauthorised reproduction of images, wording and technical drawing without permission from Vertilux. Product specifications may change without notice. The colour image reproduction may vary slightly to actual product. All variations are within industry standards.