

# LS40 3/30




## FEATURES & BENEFITS

- Wired Technology
- Suitable for interior or exterior application
- Available with in-line connector for ease of programming
- Progressive adjustment limit setting
- Thin round head for discreet blending and easy integration
- Compatible with building management systems
- Fits small diameter tubes for compactness
- Suitable for tubes diameter 40 mm (internal diameter)

## SYSTEM COMPATIBILITY

- ROLLER SYSTEM
- ROMAN SYSTEM
- VENETIAN SYSTEM
- PLEATED SYSTEM
- SHEER SYSTEM

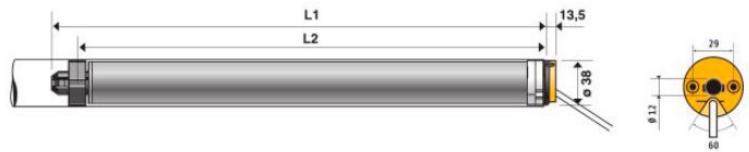

Note: Motor Options are also dependent on compatibility with our minimum motor widths chart.

## TECHNICAL SPECIFICATIONS

POWER (NM):	3
NOMINAL VOLTAGE/FREQUENCY:	230V / 50 Hz
NOISE LEVEL:	50 dB(A)*
SPEED (RPM):	30
LIFT (KG):	9.5
MINIMUM MOTOR WIDTH:	600mm
THERMAL TIME:	4mn
PROTECTION INDEX:	IP44
INSULATION CLASS:	Class II
CABLE TYPE:	VVF

\*Sound pressure at a distance of 1mtr from the carrier product at nominal torque.