


SONESSE 40 WT 6/20

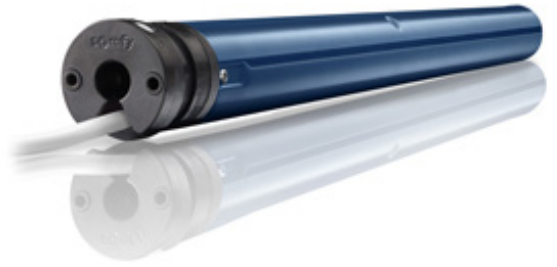


FEATURES & BENEFITS

- Wired Technology
- Suitable for interior application
- Quiet Operation motor
- Available with in-line connector for ease of programming
- Progressive adjustment limit setting
- Compatible with building management systems
- For use in systems with heavier weight fabrics and base rails such as Z1 ZIP Systems or large multilinked roller blinds
- Black and thin round head for discreet blending
- Suitable for tubes diameter 40 mm (internal diameter)

SYSTEM COMPATIBILITY

- ROLLER SYSTEM
- ROMAN SYSTEM
- VENETIAN SYSTEM
- PLEATED SYSTEM
- SHEER SYSTEM

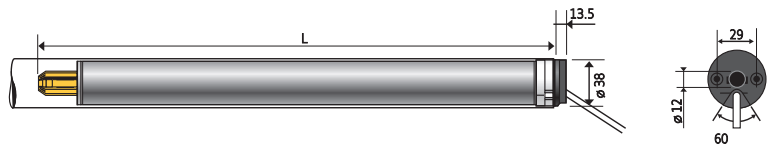

Note: Motor Options are also dependent on compatibility with our minimum motor widths chart.

TECHNICAL SPECIFICATIONS

POWER (NM):	6
NOMINAL VOLTAGE/FREQUENCY:	230V / 50 Hz
NOISE LEVEL:	45 dB(A)*
SPEED (RPM):	20
LIFT (KG):	16
MINIMUM MOTOR WIDTH:	600mm
THERMAL TIME:	4mn
PROTECTION INDEX:	IP44
INSULATION CLASS:	Class II
CABLE TYPE:	PVC

*Sound pressure at a distance of 1mtr from the carrier product at nominal torque.