

WSEC40 5/28

FEATURES & BENEFITS


- 35mm Tubular Motor with 3m tail
- Suitable for interior application
- Electronic Limit Switch
- Parallel wiring compatible
- Counter balanced noise suppression
- Easy operation and integration with Building Management Systems (BMS)
- Best choice for BMS where electrolled 4 core motors are required
- 5 year Vertilux Warranty



SYSTEM COMPATIBILITY

- ROLLER SYSTEM

Note: Motor Options are also dependent on compatibility with our minimum motor widths chart.

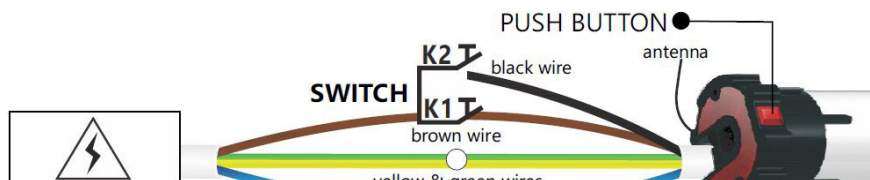

TECHNICAL SPECIFICATIONS

RATED TORQUE (NM):	5
OUTPUT SPEED (RPM):	28
NOMINAL CONSUMPTION (W)	116
NOMINAL VOLTAGE (V)	240
RADIO FREQUENCY	50Hz
NOMINAL CURRENT (A)	0.49
RUNNING TIME (MIN)	4
PROTECTION INDEX (IP)	44
TURN CAPACITY:	INFINITE
MIN MOTOR LENGTH (MM)	630